


FIBERLOCK TECHNOLOGIES




QUALITY

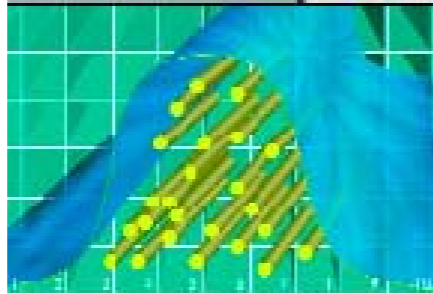

KNOWLEDGE



SCIENCE

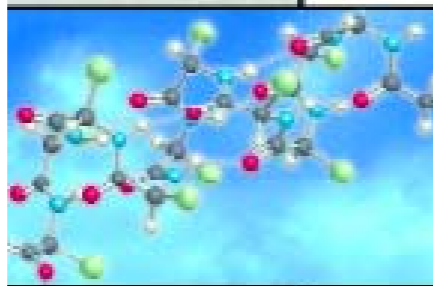

POWER BLOCK

Interior/Exterior
Stain Blocking Primer

COVERAGE:

Smooth Surfaces: 400-500 ft²/gal.

Porous Surfaces: 100-300 ft²/gal.

DRYING TIME @ 70°F 50% R.H.:

To Touch: 30 minutes

To Recoat: 2 hours

CLEAN UP: Clean tools and drippings with warm soapy water before Power Block dries. Dispose of all waste according to all existing local, state and federal regulations.

CAS NO.

7732-18-5

13463-67-7

107-21-1

1314-13-2

1317-65-3

Not Available*

Chemical Ingredients

Water

Titanium dioxide

Ethylene glycol

Zinc Oxide

Calcium carbonate

Latex resin solids

*Contents partially unknown

CAUTION!

KEEP OUT OF REACH OF CHILDREN.

Do not take internally. Close container after each use. Keep from freezing.

24 hour Emergency "CHEM-TEL" Phone: 1-800-255-3924

DISCLAIMER: These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither Fiberlock Technologies, Inc., nor its agents shall be responsible for the use of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of **Power Block** for each specific project and for the health and safety of personnel working in the area.

For additional information and/or precautions check Material Safety Data Sheet (MSDS) or Product Data Sheet (PDS) available online at www.fiberlock.com

FOR PROFESSIONAL USE ONLY
5 U.S. Gallons(18.925 Liters) Net
Max VOC Content: 200 g/l

5450

www.fiberlock.com

Fiberlock Technologies, Inc.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com